





Be ahead

RANCH C



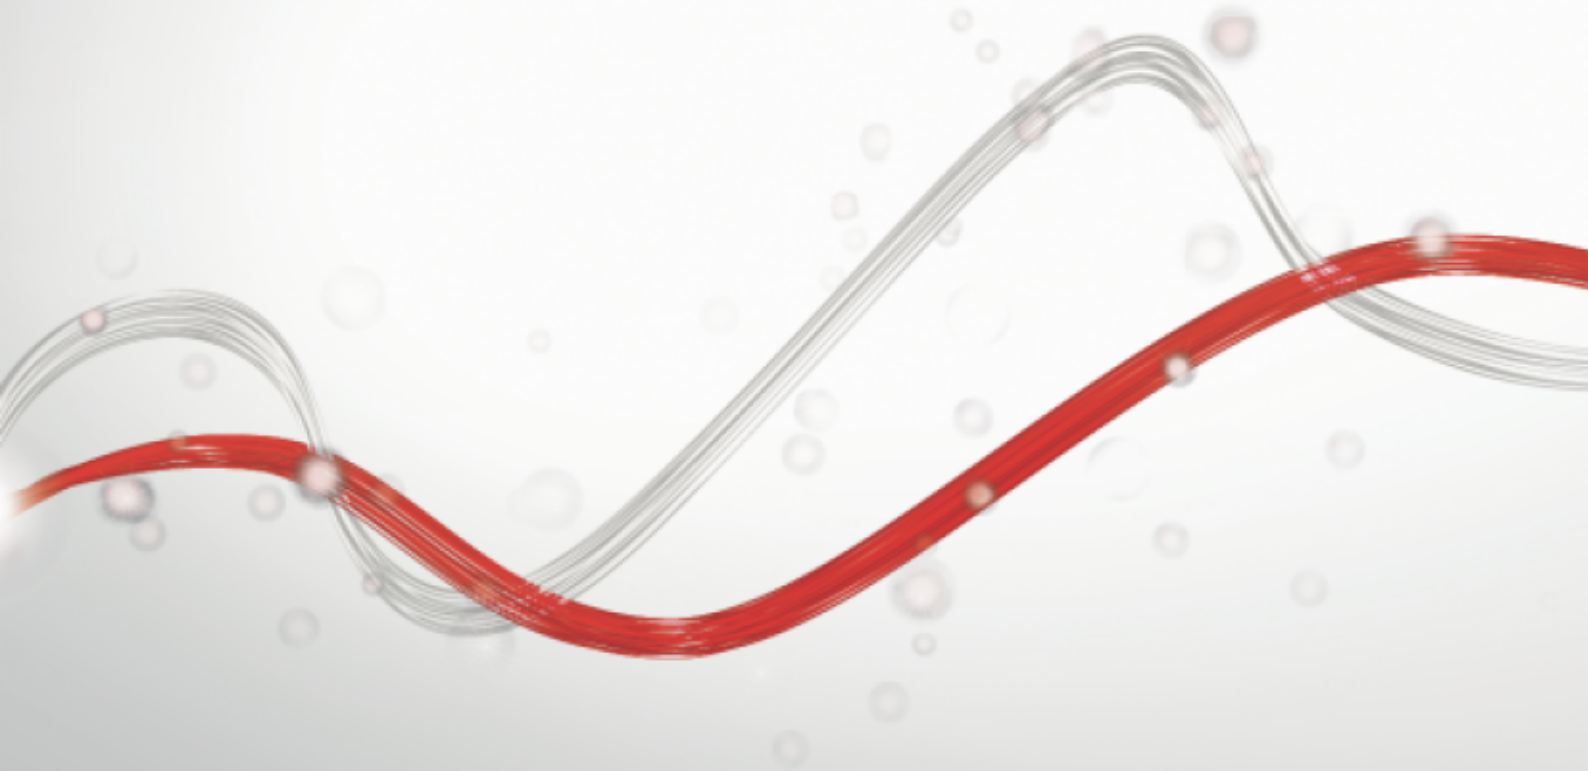

Parking and traffic bollards

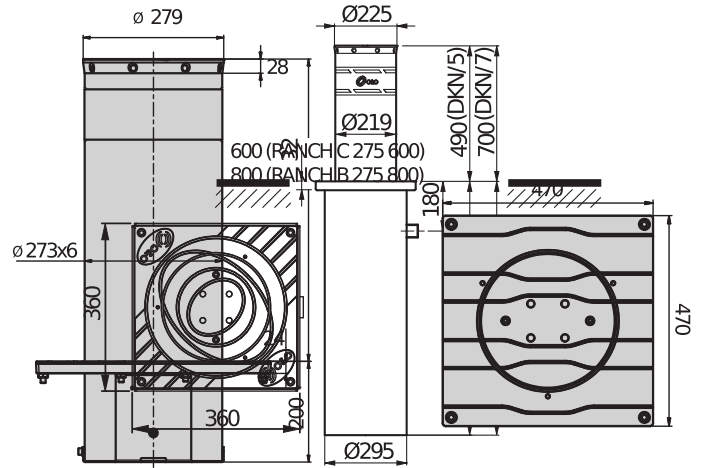

Fixed bollards used for preventing access for long periods. Bolted to the ground, their purpose is to block an access point or a road. They can integrate the use of automatic or semi-automatic bollards.





Parking and traffic bollards

RANCH C

Code	Name	Description
P970102 00001	RANCH C 275/600CN	Fixed bollard used for long-term access prevention. Height 600 mm and diameter 273 mm. Version without lights and stainless steel painted shaft, RAL 7015. Flange not included High breakage resistance
P970102 00101	RANCH C 275/600CN - RAL	Fixed bollard used for long-term access prevention. Height 600 mm and diameter 273 mm. Version without lights and painted steel shaft. RAL colour to order. Flange not included. High breakage resistance
P970102 00002	RANCH C 275/600CN L	Fixed bollard used for long-term access prevention. Height 600 mm and diameter 273 mm. Version with lights and painted steel shaft, RAL 7015. Flange not included Painted steel High breakage resistance
P970102 00102	RANCH C 275/600CN L - RAL	Fixed bollard used for long-term access prevention. Height 600 mm and diameter 273 mm. Version with lights and painted steel shaft. RAL colour to order. Flange not included High breakage resistance
P970102 00003	RANCH C 275/600CN I	Fixed bollard used for long-term access prevention. Height 600 mm and diameter 273 mm. Version without lights and stainless steel shaft. Flange not included. Stainless steel High breakage resistance
P970102 00004	RANCH C 275/600CN LI	Fixed bollard used for long-term access prevention. Height 600 mm and diameter 273 mm. Version with lights and stainless steel shaft. Flange not included. High breakage resistance
P970103 00002	RANCH C 275/800CN L	Fixed bollard used for long-term access prevention. Height 800 mm and diameter 273 mm. Version with lights and painted steel shaft, RAL 7015. Flange not included High breakage resistance
P970103 00102	RANCH C 275/800CN L - RAL	Fixed bollard used for long-term access prevention. Height 800 mm and diameter 273 mm. Version with lights and painted steel shaft. RAL colour to order. Flange not included. High breakage resistance
P970103 00004	RANCH C 275/800CN LI	Fixed bollard used for long-term access prevention. Height 800 mm and diameter 273 mm. Version with lights and stainless steel shaft. Flange not included. High breakage resistance

	RANCH C 275/600CN	RANCH C 275/600CN - RAL	RANCH C 275/600CN L	RANCH C 275/600CN L - RAL	RANCH C 275/600CN I	RANCH C 275/600CN LI
Operator type	Fixed bollards	Fixed bollards	Fixed bollards	Fixed bollards	Fixed bollards	Fixed bollards
Rod height	600 mm	600 mm	600 mm	600 mm	600 mm	600 mm
Rod thickness	6 mm	6 mm	6 mm	6 mm	6 mm	6 mm
Rod diameter	273 mm	273 mm	273 mm	273 mm	273 mm	273 mm
Rod treatment	RAL 7015 painted steel	RAL 7015 painted steel	RAL 7015 painted steel	RAL 7015 painted steel	brushed AISI 316 stainless steel and reflective film	brushed AISI 316 stainless steel and reflective film
Rod fixing	3 bolts	3 bolts	3 bolts	3 bolts	3 bolts	3 bolts

	RANCH C 275/800CN L	RANCH C 275/800CN L - RAL	RANCH C 275/800CN LI
Operator type	Fixed bollards	Fixed bollards	Fixed bollards
Rod height	800 mm	800 mm	800 mm
Rod thickness	6 mm	6 mm	6 mm
Rod diameter	273 mm	273 mm	273 mm
Rod treatment	RAL 7015 painted steel	RAL 7015 painted steel	brushed AISI 316 stainless steel and reflective film
Rod fixing	3 bolts	3 bolts	3 bolts





Parking and traffic bollards

RECOMMENDED ACCESSORIES

	P800104 - ALLU Power supply for fixed Ranch E bollards		P800109 - FLANGE RANCH C Flange for Ranch C
--	--	---	---





Parking and traffic bollards

What is U-Link?

The technology that gives you more power

U-Link, Universal Link, is an exclusive BFT platform that can be used to create high-tech ecosystems. In Home Access Automation, it can be used to communicate with all home access automation devices of any brand. This saves you time and allows you to control everything easily and without any worries.

It is intuitive

Easy to install and to use

It is scalable

You can add as many devices as you want

It is flexible

It allows you to create groups of interconnected products

It is practical

Works with or without an internet connection

It is functional

Its settings can be controlled remotely using dedicated applications



Parking and traffic bollards

Everything on one screen: find out more about this amazing technology

A world-exclusive platform that **can be used to create high-tech ecosystems** offering a vast range of solutions for many different sectors.

This proprietary platform which is a key feature of BFT products, thanks to the B-EBA cards and the Clonix U-Link receiver, is suitable for any protocol or product for access automation (including BFT products non-BFT ones and older versions) and it can be used in a variety of different sectors. This means any device becomes a smart device which can be interconnected with other systems, using a language that is becoming universal.




U-Control HOME

U-Control HOME is the application that allows you to open the gate to your home and to remotely control BFT automations using your own smartphone. The iOS version can be used to automatically open the automation when you are close to it.



U-Base 2

A software package for installation, performing maintenance and identifying any faults in the U-Link compatible operators, easily and conveniently.



U-SDK

U-SDK is the application which allows BFT automations to be made compatible and easily integrated with a BMS network.



Clonix U-Link

Connect non-native U-Link and non-BFT products to U-Link systems.


Is it possible to connect non-native U-Link BFT operators or other brands of products to U-Link? Yes, thanks to the Clonix receivers. Accessories which accept no limits.



B-EBA

A direct link to your operators.

The B-EBA expansion cards make it possible to connect external devices such as PCs, smartphones and tablets to a BFT operator and a Clonix receiver or to connect multiple BFT products in a U-Link network. These accessories integrate with U-Link technology and with Bluetooth, Wifi, Z-Wave and TCP/IP protocols as well as with the RS485 serial interface. A device that demonstrates exactly what BFT means by interconnectivity.

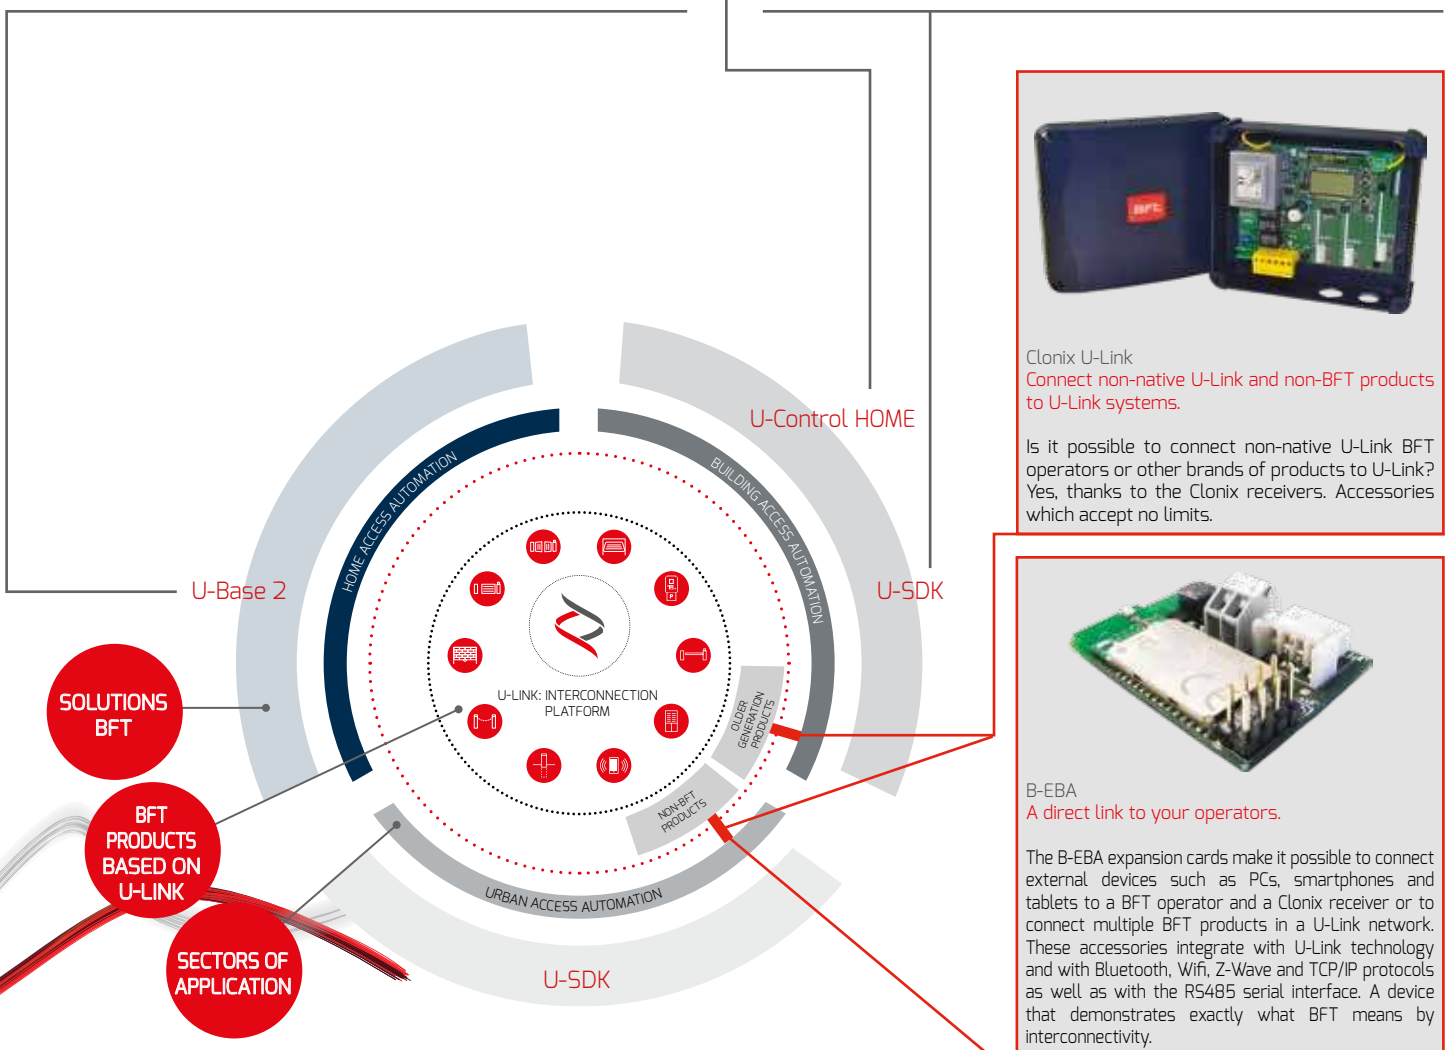



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.