





Be ahead

RANCH E



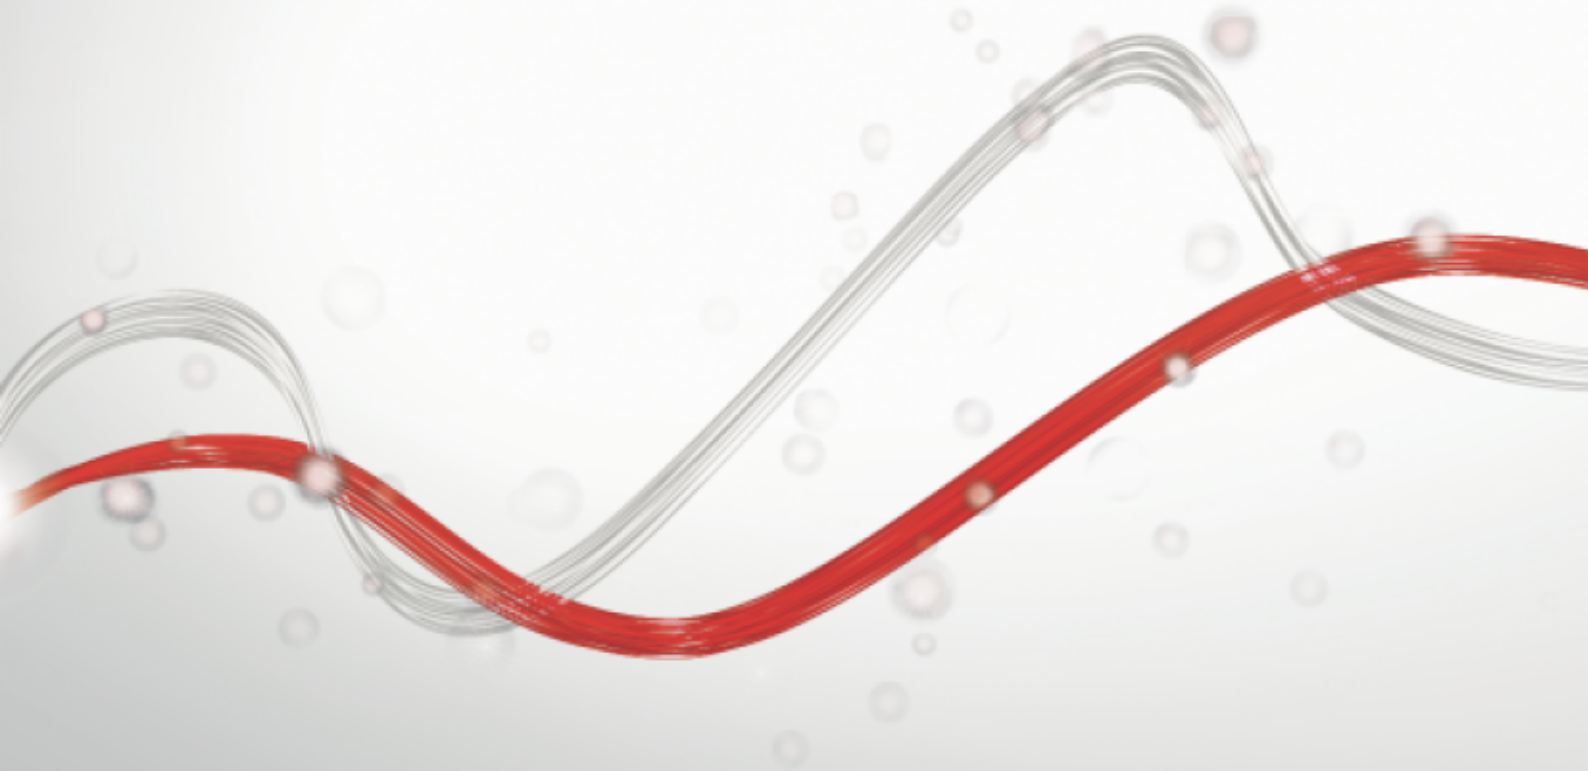

Anti-Terrorism bollards

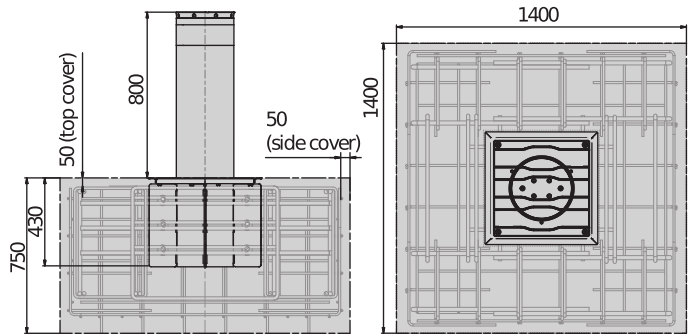

Permanent bollard equivalent to XPASS 330/1200. Suitable for protection of sensitive sites in addition to automatic bollards on large surfaces.





Anti-Terrorism bollards


RANCH E

Code	Name	Description
P970269 00001	RANCH E 330/1200C	Fixed anti-terrorism bollard, with shaft height 1200 mm and diameter 330 mm. Version with cap without lights and RAL 7015 painted steel shaft. Flange not included High breakage resistance
P970269 00101	RANCH E 330/1200C - RAL	Fixed anti-terrorism bollard, with shaft height 1200 mm and diameter 330 mm. Version with painted stainless steel shaft. RAL colour to order. Flange not included High breakage resistance
P970269 00002	RANCH E 330/1200C I	Fixed anti-terrorism bollard, with shaft height 1200 mm and diameter 330 mm. Version with cap without lights and stainless steel AISI 304 tube. Flange not included High breakage resistance
P970269 00003	RANCH E 330/1200C LI	Fixed anti-terrorism bollard, with shaft height 1200 mm and diameter 330 mm. Version with stainless steel AISI 304 shaft. Flange not included Cap with lights.

	RANCH E 330/1200C	RANCH E 330/1200C - RAL	RANCH E 330/1200C I	RANCH E 330/1200C LI
Operator type	Fixed bollards	Fixed bollards	Fixed bollards	Fixed bollards
Rod height	1200 mm	1200 mm	1200 mm	1200 mm
Rod thickness	14 mm	14 mm	14 mm	14 mm
Rod diameter	330 mm	330 mm	330 mm	330 mm
Rod treatment	RAL 7015 painted steel and reflective film H: 100 mm	RAL 7015 painted steel and reflective film H: 100 mm	Stainless steel	Stainless steel
Break-in proof	2100000 J	2100000 J	2100000 J	2100000 J

RECOMMENDED ACCESSORIES

	P800119 - FLANGE RANCH E Flange for Ranch E		P975069 - ALLU K12 Power supply for fixed Ranch E bollards
--	---	---	--

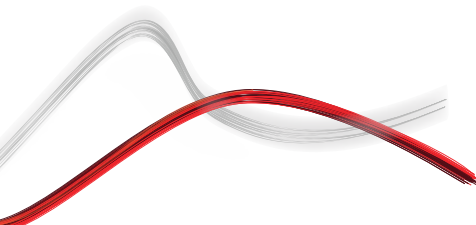



Anti-Terrorism bollards

What is U-Link?

The technology that gives you more power

U-Link, Universal Link, is an exclusive BFT platform that can be used to create high-tech ecosystems. In Home Access Automation, it can be used to communicate with all home access automation devices of any brand. This saves you time and allows you to control everything easily and without any worries.

It is intuitive

Easy to install and to use

It is scalable

You can add as many devices as you want

It is flexible

It allows you to create groups of interconnected products

It is practical

Works with or without an internet connection

It is functional

Its settings can be controlled remotely using dedicated applications



Anti-Terrorism bollards

Everything on one screen: find out more about this amazing technology

A world-exclusive platform that **can be used to create high-tech ecosystems** offering a vast range of solutions for many different sectors.

This proprietary platform which is a key feature of BFT products, thanks to the B-EBA cards and the Clonix U-Link receiver, is suitable for any protocol or product for access automation (including BFT products non-BFT ones and older versions) and it can be used in a variety of different sectors. This means any device becomes a smart device which can be interconnected with other systems, using a language that is becoming universal.



U-Control HOME

U-Control HOME is the application that allows you to open the gate to your home and to remotely control BFT automations using your own smartphone. The iOS version can be used to automatically open the automation when you are close to it.



U-Base 2

A software package for installation, performing maintenance and identifying any faults in the U-Link compatible operators, easily and conveniently.



U-SDK

U-SDK is the application which allows BFT automations to be made compatible and easily integrated with a BMS network.



Clonix U-Link

Connect non-native U-Link and non-BFT products to U-Link systems.


Is it possible to connect non-native U-Link BFT operators or other brands of products to U-Link? Yes, thanks to the Clonix receivers. Accessories which accept no limits.



B-EBA

A direct link to your operators.

The B-EBA expansion cards make it possible to connect external devices such as PCs, smartphones and tablets to a BFT operator and a Clonix receiver or to connect multiple BFT products in a U-Link network. These accessories integrate with U-Link technology and with Bluetooth, Wifi, Z-Wave and TCP/IP protocols as well as with the RS485 serial interface. A device that demonstrates exactly what BFT means by interconnectivity.

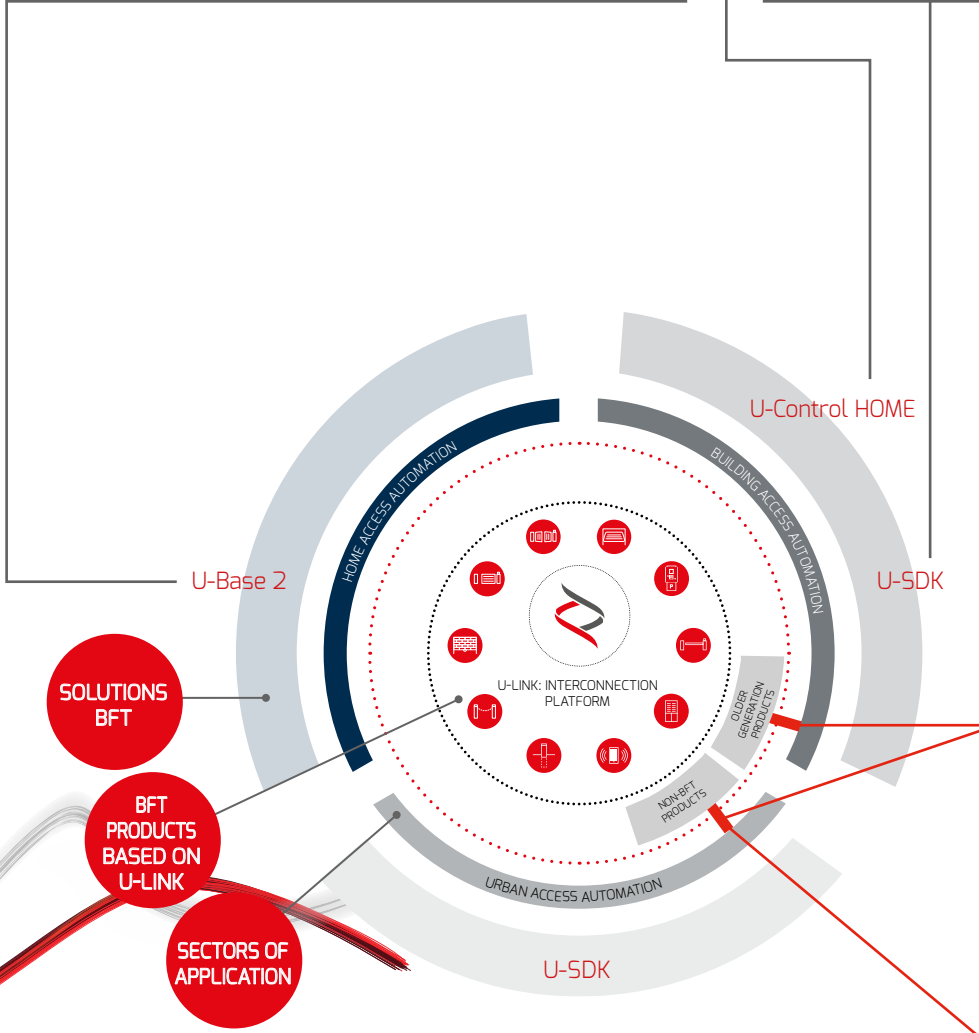



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.