





Be ahead

STOPPY MBB



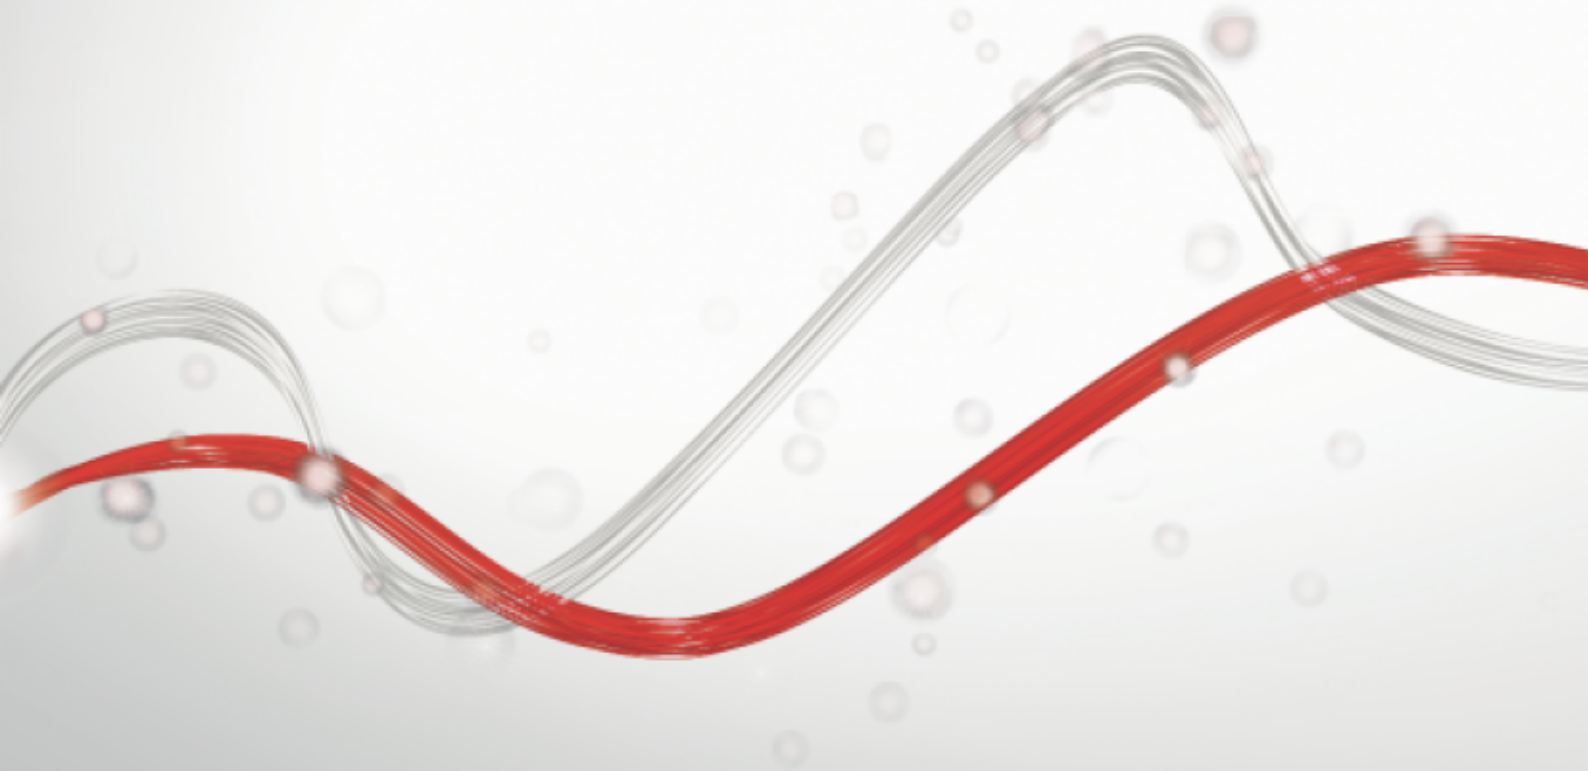

Parking and traffic bollards

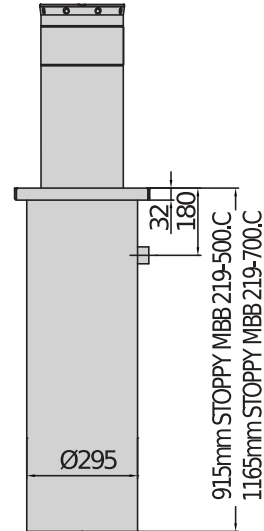


Complete range of automatic electromechanical retractable bollards for the protection and safety of all areas that require controlled access. Rod height 500 and 700mm. Ideal for contexts of particular architectural interest, guaranteeing maximum reliability over time and requiring minimal maintenance.

Relevant features




The option of supply as an integrated unit or with outer casing separate from the operator allows the installer to complete digging and preparation for installation ahead of time.



The new square flange allows for perfect architectonic integration and hence better insertion into the full range of urban contexts.



The conical stem cap and EPDM flange gasket provide highly effective protection against foreign matter entering between the stem and the outer casing, thus making the unit maintenance free.

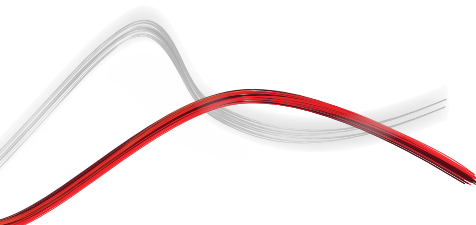



Parking and traffic bollards

STOPPY MBB

Code	Name	Description
R950008 00002	STOPPY MBB KIT 219/500.C 230 C	Electromechanical bollard with foundation box, with shaft height 490 mm and diameter 219 mm. Impact resistance 10500 J. Painted stainless steel version, RAL 7015.
R950008 00102	STOPPY MBB KIT 219/500.C 230 C - RAL	Electromechanical bollard with foundation box, with shaft height 490 mm and diameter 219 mm. Impact resistance 10500 J. RAL colour as requested.
R950008 00003	STOPPY MBB KIT 219/500.C 230 L C	Electromechanical bollard with foundation box, with shaft height 490 mm and diameter 219 mm. Impact resistance 10500 J. Cap with integrated lights and buzzer. Painted stainless steel version, RAL 7015.
R950008 00103	STOPPY MBB KIT 219/500.C 230 L C - RAL	Electromechanical bollard with foundation box, with shaft height 490 mm and diameter 219 mm. Impact resistance 10500 J. Cap with integrated lights and buzzer. RAL colour as requested.
R950008 00004	STOPPY MBB KIT 219/500.C 230 LI C	Electromechanical bollard with foundation box, with shaft height 490 mm and diameter 219 mm. Impact resistance 10500 J. Cap with integrated lights and buzzer. Stainless steel version
R950009 00002	STOPPY MBB KIT 219/700.C 230 C	Electromechanical bollard with foundation box, with shaft height 700 mm and diameter 219 mm. Impact resistance 10500 J. Painted stainless steel version, RAL 7015.
R950009 00102	STOPPY MBB KIT 219/700.C 230 C - RAL	Electromechanical bollard with foundation box, with shaft height 700 mm and diameter 219 mm. Impact resistance 10500 J. RAL colour as requested.
R950009 00003	STOPPY MBB KIT 219/700.C 230 L C	Electromechanical bollard with foundation box, with shaft height 700 mm and diameter 219 mm. Impact resistance 10500 J. Cap with integrated lights and buzzer. Painted stainless steel version, RAL 7015.
R950009 00103	STOPPY MBB KIT 219/700.C 230 L C - RAL	Electromechanical bollard with foundation box, with shaft height 700 mm and diameter 219 mm. Impact resistance 10500 J. Cap with integrated lights and buzzer. RAL colour as requested.
R950009 00004	STOPPY MBB KIT 219/700.C 230 LI C	Electromechanical bollard with foundation box, with shaft height 700 mm and diameter 219 mm. Impact resistance 10500 J. Cap with integrated lights and buzzer. Stainless steel version

PERSEO CBE 230.P SD: Control unit with U-Link, receiver and incorporated heating circuit (to -40°C) for electro-mechanical and hydraulic bollards. Can manage up to 4 bollards at the same time (or up to 2 Xpass 1200)



D113812 00002 - PERSEO CBE 230.P SD - Recommended



- Control unit with U-Link, receiver and incorporated heating circuit (to -40°C) for electro-mechanical and hydraulic bollards. Can manage up to 4 bollards at the same time (or up to 2 Xpass 1200)
- Application: Control panel for operating 1 to 4 automatic bollards, single-phase (in parallel) (or max. 2 XPASS B 330/1200)
- Board power supply: 230V single phase
- Output power: 230Vac single-phase, 12A max.
- Main features: removable terminal blocks, digital programming, 3-digit display, Proxima programmer connector, dual-channel receiver 2048 codes included, heater for operation to -40°C, complete support for anti-terrorism bollards, 11 inputs, 9 outputs.
- Main features: U-Link interconnectivity, automatic reclosing, separate open and close, pre-flashing, deadman control, automatic or semi-automatic, opening and closing limit switch management, arranged for UPS.

	STOPPY MBB KIT 219/500.C 230 C	STOPPY MBB KIT 219/500.C 230 C - RAL	STOPPY MBB KIT 219/500.C 230 L C	STOPPY MBB KIT 219/500.C 230 L C - RAL	STOPPY MBB KIT 219/500.C 230 LI C	STOPPY MBB KIT 219/700.C 230 C
Control unit	PERSEO CBE 230.P SD	PERSEO CBE 230.P SD	PERSEO CBE 230.P SD	PERSEO CBE 230.P SD	PERSEO CBE 230.P SD	PERSEO CBE 230.P SD
Power supply system	230 V	230 V	230 V	230 V	230 V	230 V
Power consumption	300 W	300 W	300 W	300 W	300 W	300 W







Parking and traffic bollards

	STOPPY MBB KIT 219/500.C 230 C	STOPPY MBB KIT 219/500.C 230 C - RAL	STOPPY MBB KIT 219/500.C 230 L C	STOPPY MBB KIT 219/500.C 230 L C - RAL	STOPPY MBB KIT 219/500.C 230 LI C	STOPPY MBB KIT 219/700.C 230 C
Opening or closing time	5 s	5 s	5 s	5 s	5 s	9 s
Rod height	490 mm	490 mm	490 mm	490 mm	490 mm	700 mm
Rod diameter	219 mm	219 mm	219 mm	219 mm	219 mm	219 mm
Type of limit switch	REED magnetic sensor	REED magnetic sensor	REED magnetic sensor	REED magnetic sensor	REED magnetic sensor	REED magnetic sensor
Slowdown	Yes	Yes	Yes	Yes	Yes	Yes
Impact resistance	10500 J	10500 J	10500 J	10500 J	10500 J	10500 J
Break-in proof	150000 J	150000 J	150000 J	150000 J	150000 J	150000 J
Manual cycle	reversible in the absence of voltage	reversible in the absence of voltage	reversible in the absence of voltage	reversible in the absence of voltage	reversible in the absence of voltage	reversible in the absence of voltage
Frequency of use	very intensive	very intensive	very intensive	very intensive	very intensive	very intensive
Protection rating	IP67	IP67	IP67	IP67	IP67	IP67
Environmental conditions	-40 ÷ 60 °C	-40 ÷ 60 °C	-40 ÷ 60 °C	-40 ÷ 60 °C	-40 ÷ 60 °C	-40 ÷ 60 °C

	STOPPY MBB KIT 219/700.C 230 C - RAL	STOPPY MBB KIT 219/700.C 230 L C	STOPPY MBB KIT 219/700.C 230 L C - RAL	STOPPY MBB KIT 219/700.C 230 LI C
Control unit	PERSEO CBE 230.P SD	PERSEO CBE 230.P SD	PERSEO CBE 230.P SD	PERSEO CBE 230.P SD
Power supply system	230 V	230 V	230 V	230 V
Power consumption	300 W	300 W	300 W	300 W
Opening or closing time	9 s	9 s	9 s	9 s
Rod height	700 mm	700 mm	700 mm	700 mm
Rod diameter	219 mm	219 mm	219 mm	219 mm
Type of limit switch	REED magnetic sensor	REED magnetic sensor	REED magnetic sensor	REED magnetic sensor
Slowdown	Yes	Yes	Yes	Yes
Impact resistance	10500 J	10500 J	10500 J	10500 J
Break-in proof	150000 J	150000 J	150000 J	150000 J
Manual cycle	reversible in the absence of voltage	reversible in the absence of voltage	reversible in the absence of voltage	reversible in the absence of voltage
Frequency of use	very intensive	very intensive	very intensive	very intensive
Protection rating	IP67	IP67	IP67	IP67
Environmental conditions	-40 ÷ 60 °C	-40 ÷ 60 °C	-40 ÷ 60 °C	-40 ÷ 60 °C

RECOMMENDED ACCESSORIES

	P800116 - TOTEM UNIT		new P800116 00102 - TOTEM UNIT - RAL
	Base module for TOTEM, can be used for both lower and upper units.		Base module for TOTEM, can be used for both lower and upper units. RAL colour as requested.
	P800117 - TLIGHTS		P800117 00102 - TLIGHTS - RAL
	Traffic lights and top covering for totem		Traffic lights and upper cover for totem unit. RAL colour to order





Parking and traffic bollards

RECOMMENDED ACCESSORIES

	<p>P800075 - STOPPY ALARM</p> <p>Anti-theft kit: to be ordered separately, assembled during production</p>		<p>P800114 - BOLLARD CABLE EXT25</p> <p>Extra charge for 25 m cable for bollards (to be added to the 10 included into bollards)</p>
	<p>P800115 - BOLLARD CABLE EXT50</p> <p>Extra charge for 50 m cable for bollards (to be added to the 10 included into bollards)</p>		<p>P975005 - BATT-EB</p> <p>Backup battery kit to allow bollards to stay up in case of no power</p>
	<p>P800040 - TPF</p> <p>Foundation and anchor plate for totem</p>		<p>P800108 - TCAP</p> <p>Top covering without lights for elements of Totem.</p>
	<p>P800108 00102 - TCAP - RAL</p> <p>Top covering without lights for elements of Totem. RAL colour as requested.</p>		<p>D113705 - ACOUSTIC DETECTOR</p> <p>Adjustable acoustic detector for sirens</p>
	<p>P111001 00003 - RME 2</p> <p>230 V dual channel metal object detector with installation base</p>		<p>D110926 00001 - SPIRA 2X1</p> <p>Magnetic loop 2 x 1 m</p>





Parking and traffic bollards

What is U-Link?

The technology that gives you more power

U-Link, Universal Link, is an exclusive BFT platform that can be used to create high-tech ecosystems. In Home Access Automation, it can be used to communicate with all home access automation devices of any brand. This saves you time and allows you to control everything easily and without any worries.

It is intuitive

Easy to install and to use

It is scalable

You can add as many devices as you want

It is flexible

It allows you to create groups of interconnected products

It is practical

Works with or without an internet connection

It is functional

Its settings can be controlled remotely using dedicated applications



Parking and traffic bollards

Everything on one screen: find out more about this amazing technology

A world-exclusive platform that **can be used to create high-tech ecosystems** offering a vast range of solutions for many different sectors.

This proprietary platform which is a key feature of BFT products, thanks to the B-EBA cards and the Clonix U-Link receiver, is suitable for any protocol or product for access automation (including BFT products non-BFT ones and older versions) and it can be used in a variety of different sectors. This means any device becomes a smart device which can be interconnected with other systems, using a language that is becoming universal.



U-Control HOME

U-Control HOME is the application that allows you to open the gate to your home and to remotely control BFT automations using your own smartphone. The iOS version can be used to automatically open the automation when you are close to it.



U-Base 2

A software package for installation, performing maintenance and identifying any faults in the U-Link compatible operators, easily and conveniently.



U-SDK

U-SDK is the application which allows BFT automations to be made compatible and easily integrated with a BMS network.



Clonix U-Link

Connect non-native U-Link and non-BFT products to U-Link systems.


Is it possible to connect non-native U-Link BFT operators or other brands of products to U-Link? Yes, thanks to the Clonix receivers. Accessories which accept no limits.



B-EBA

A direct link to your operators.

The B-EBA expansion cards make it possible to connect external devices such as PCs, smartphones and tablets to a BFT operator and a Clonix receiver or to connect multiple BFT products in a U-Link network. These accessories integrate with U-Link technology and with Bluetooth, Wifi, Z-Wave and TCP/IP protocols as well as with the RS485 serial interface. A device that demonstrates exactly what BFT means by interconnectivity.

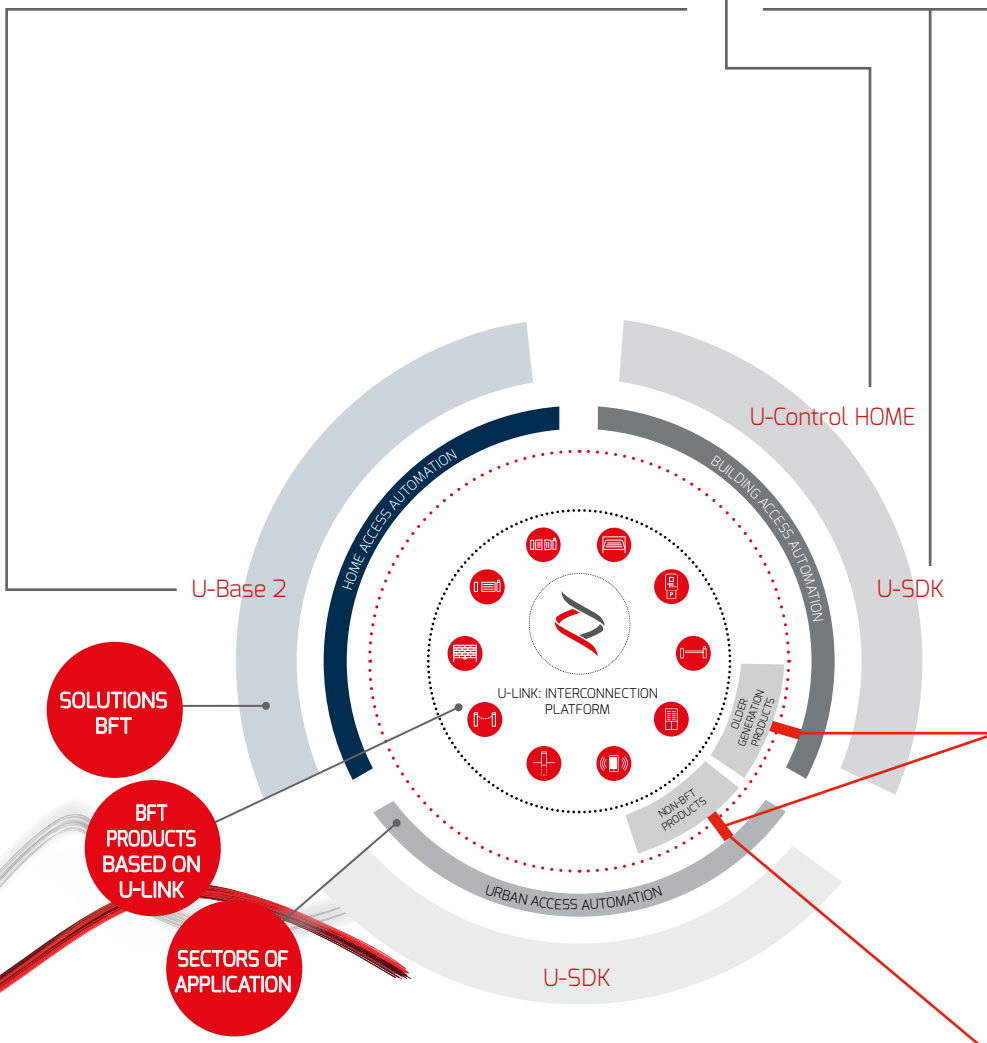



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.